





**JK Series**  
Solids Passage 30~50 mm  
Non-clogging vortex impeller design



Model	Output		Outlet		Pass solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H (mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
JK-05	1/2	0.4	50	2"	30	320	290	180	50	-	-	10	223 x 132 x 395	14
JK-10	1	0.75	50	2"	30	410	370	250	100	-	-	11	223 x 132 x 425	21
JK-20	2	1.5	80	3"	35	630	590	490	380	240	55	16	390 x 210 x 530	32
							<b>3M</b>	<b>6M</b>	<b>10M</b>	<b>15M</b>	<b>20M</b>			
JK-30	3	2.2	80	3"	35	800	750	670	440	180	-	18	390 x 210 x 550	34
JK-50	5	3.7	100	4"	45	1100	1000	880	590	290	-	20	525 x 250 x 635	45
JK-75	7.5	5.5	100	4"	50	1200	1150	1050	800	520	190	23	525 x 250 x 675	54

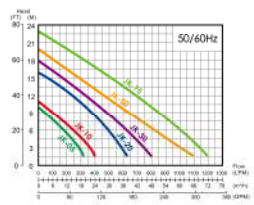


**DSK Series**  
Sewage Cutter Pumps



Model	Output		Outlet		Pass solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H (mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
DSK-05	1/2	0.5	50	2"	30	280	280	200	70	-	-	10	245 x 188 x 420	18
DSK-10	1	0.75	50	2"	30	430	410	340	200	40	-	13	280 x 195 x 420	30
DSK-20	2	1.5	80	3"	35	700	670	520	350	200	40	16	280 x 195 x 425	35
DSK-30	3	2.2	80	3"	35	900	860	780	630	450	250	19	410 x 240 x 520	46
DSK-50	5	3.7	100	4"	45	1200	1180	1120	980	720	450	20	480 x 250 x 550	62
							<b>5M</b>	<b>10M</b>	<b>15M</b>	<b>20M</b>	<b>25M</b>			
DSK-75	7.5	5.5	100	4"	50	1900	1850	1480	950	400	-	24	485 x 300 x 735	104
DSK-100	10	7.5	150	6"	60	2300	2260	2000	1500	850	220	27	485 x 300 x 840	114

**DSP Series**  
Submersible Sewage Pump  
Heavy Duty Industrial application  
Solid pass 40~65mm  
Optional for cutter impeller



DSP Impeller

Optional Cutter Impeller for Cutter Pump Application.

7.5 HP  
10 HP  
15 HP

2 HP  
3 HP  
5 HP


Slide rail kits are available for easy removal and installation.

Model	Output		Outlet		Pass solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H (mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
DSP-20	2	1.5	80	3"	40	800	750	620	480	310	150	18	400 x 240 x 545	37
DSP-30	3	2.2	80/100	3" / 4"	40	1200	1130	990	800	590	380	20	425 x 220 x 615	47
DSP-50	5	3.7	80/100	3" / 4"	45	1300	1270	1170	1000	790	530	22	425 x 220 x 615	50
							<b>5M</b>	<b>10M</b>	<b>15M</b>	<b>20M</b>	<b>25M</b>			
DSP-75	7.5	5.5	100/150	4" / 6"	50	1840	1500	900	360	-	-	24	485 x 300 x 735	104
DSP-100	10	7.5	100/150	4" / 6"	65	2300	2260	2000	1500	800	200	27	485 x 300 x 840	114
DSP-150	15	11	100/150	4" / 6"	65	3000	2960	2800	2400	1800	980	32	585 x 340 x 875	165

Remarks: Add "K" for cutter impeller, ex: DSPK-20



**DS Series**

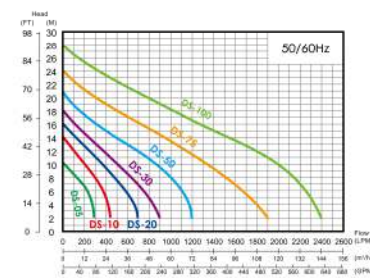

Model	Output		Outlet		Pass solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H (mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
DS-05	1/2	0.4	50	2"	20	300	290	220	60	-	-	10	245 x 188 x 420	18
DS-10	1	0.75	50	2"	15	450	435	370	240	95	-	14	280 x 195 x 420	28
DS-20	2	1.5	80	3"	15	700	680	570	410	240	50	16	285 x 223 x 550	32
DS-30	3	2.2	80	3"	15	900	860	730	550	360	170	18	410 x 240 x 520	42
							<b>5M</b>	<b>10M</b>	<b>15M</b>	<b>20M</b>	<b>25M</b>			
DS-50	5	3.7	100	4"	15	1200	1150	880	420	30	-	21	480 x 250 x 550	57
DS-75	7.5	5.5	100	4"	20	1900	1750	1350	850	310	-	24	530 x 320 x 610	64
DS-100	10	7.5	100	4"	27	2400	2300	2000	1400	810	240	28	520 x 320 x 610	75