


SV Series


Solids Passage 20~40mm
Non-clogging vortex impeller design



Model	Output		Outlet		Pass solid	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension LxWxH(mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
SV-150	1/5	150	40	1-1/2"	27	170	168	150	90	-	6	415 x 155 x 210	27	
SV-250	1/3	250	40	1-1/2"	27	220	215	190	150	90	7.5	415 x 155 x 210	27	
SV-400	1/2	400	50	2"	35	360	350	300	230	130	8	435 x 155 x 240	35	
							1.5M	3M	6M	9M	12M			
SV-550	3/4	550	80	3"	35	400	395	350	240	80	10	435 x 155 x 260	35	
SV-750	1	750	80	3"	37	430	420	395	315	150	11	435 x 155 x 260	37	
SV-1500	2	1500	80	3"	40	760	750	715	630	470	16	610 x 270 x 350	40	

SB Series

Stainless Steel Casting Pump
Solids Passage 30~50mm
Non-clogging vortex impeller design




Model	Output		Outlet		Pass solid	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension LxWxH(mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
SB-05	1/2	0.4	50	2"	30	320	290	180	50	-	10	223 x 132 x 395	14	
SB-10	1	0.75	50	2"	30	410	370	250	100	-	11	223 x 132 x 425	21	
SB-20	2	1.5	80	3"	35	630	590	490	380	240	16	390 x 210 x 530	32	
							3M	5M	10M	15M	20M			
SB-30	3	2.2	80	3"	35	800	750	670	440	180	18	390 x 210 x 550	34	
SB-50	5	3.7	100	4"	45	1100	1000	880	590	290	20	525 x 250 x 635	45	
SB-75	7.5	5.5	100	4"	50	1200	1150	1050	800	520	23	525 x 250 x 675	54	



ADL Series


High Volume and Non-Clogging
4 poles Motor

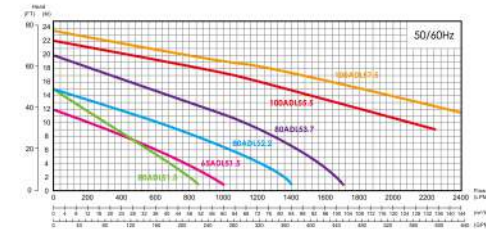

Model	Output		Outlet		Pass Solid	Max Flow (l/m)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H (mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
65ADL51.5	2	1.5	65	2.5"	40	850	750	570	370	180	-	15	497 x 491 x 576	51
80ADL51.5	2	1.5	80	3"	50	1000	850	620	300	-	-	12	524 x 292 x 597	54
80ADL52.2	3	2.2	80	3"	50	1400	1300	1030	720	370	-	15	373 x 310 x 658	66
80ADL53.7	5	3.7	80	3"	48	1700	1620	1450	1210	920	570	18	400 x 330 x 688	74
100ADL55.5	7.5	5.5	100	4"	75	2250	2200	2070	1850	1420	960	19	653 x 381 x 824	121
100ADL57.5	10	7.5	100	4"	75	2300	2300	2280	2250	2050	1500	21	653 x 381 x 824	125

ADVS Series

High Volume and Non-Clogging 2 poles Motor

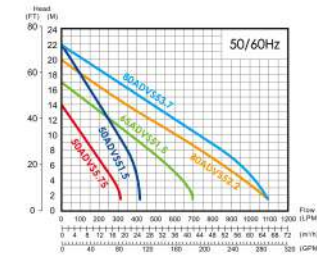

Model	Output		Outlet		Pass solid	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension LxWxH(mm)	Weight Kg
	HP	KW	mm	Inch			3M	6M	9M	12M	15M			
50ADV55.7	1	0.75	50	2"	33	320	300	230	140	55	-	14	250 x 172 x 400	19
50ADV51.5	2	1.5	50	2"	31	420	415	390	330	250	170	22	250 x 176 x 445	27
65ADV51.5	2	1.5	65	2.5"	45	700	680	560	420	250	90	17	245 x 200 x 600	34
80ADV52.2	3	2.2	80	3"	50	1100	1020	860	680	480	280	20	280 x 233 x 723	51
80ADV53.7	5	3.7	80	3"	55	1100	1060	960	800	600	420	22	280 x 233 x 723	60