

blackline
an OBL brand




WATER DIVISION



M

GENERAL CATALOGUE

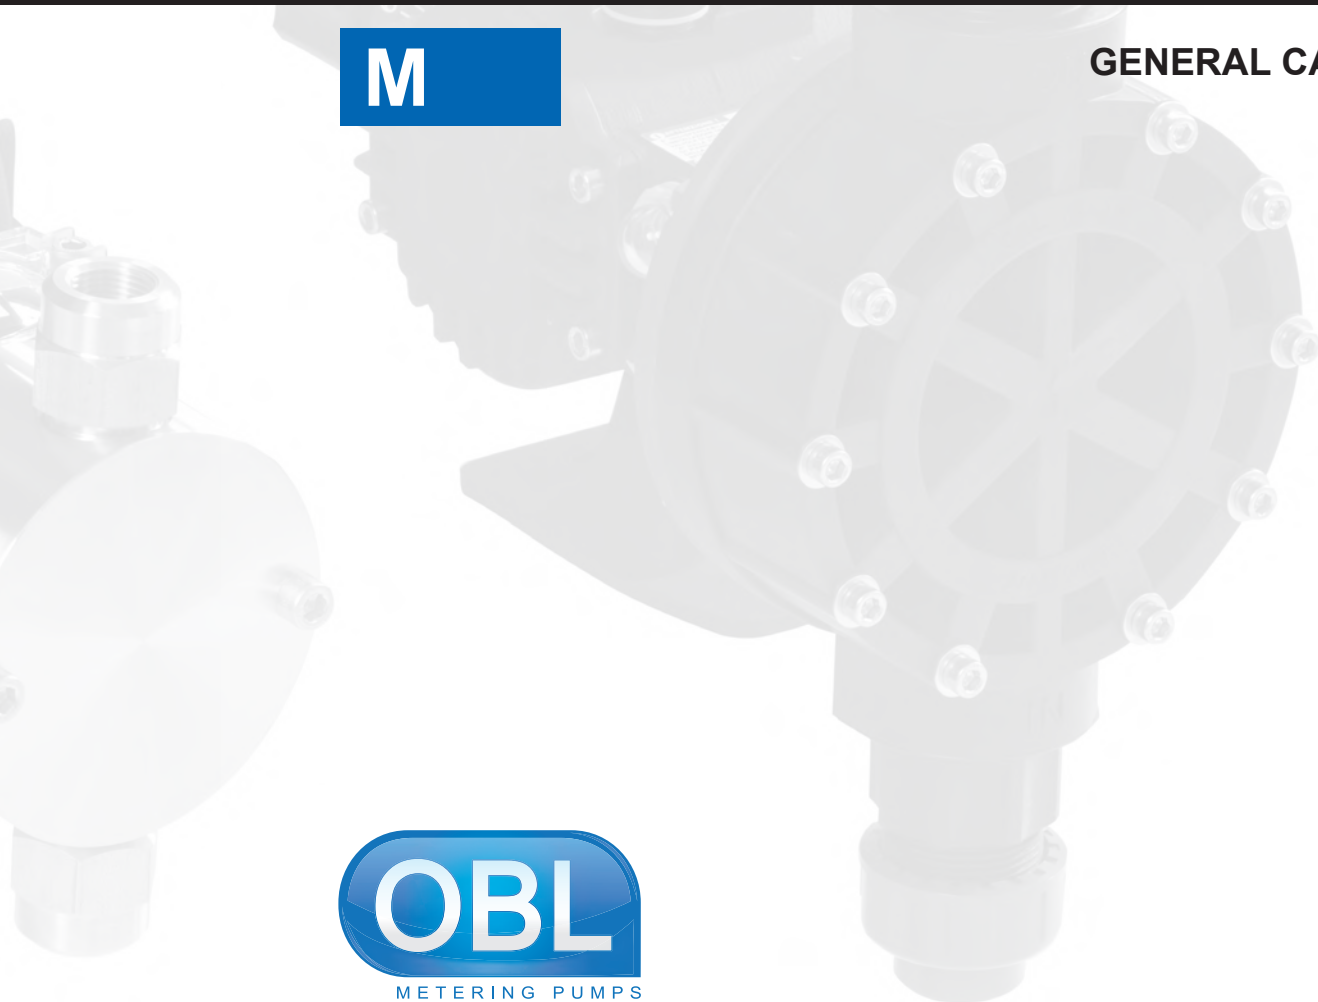

OBL
METERING PUMPS

IBEX

Motor UNEL-MEC:
Motor UNEL-MEC standard 3 phase, 50/60Hz. Single phase and ATEX options available.
Promotes standardization and enables immediate motor availability on site.

Anodized Aluminum Casing:
Improved corrosion resistance against aggressive fumes.
Extends pump life and lowers life-cycle cost.

Spring return mechanism with oversized bearing.
Extends pump life and lowers life-cycle cost.

Increased number of pumphead locking screw (12 pcs in large models).
Reliable and effective sealing during operation.





3pcs threaded connector (PP models), Metric or Inch standard:
BSP or NPT thread allows easy and simple connection to pipeline.
Reduces cost and time of installation and maintenance.

Double check valves are standard on models with flowrates up to 50 l/h, optional on flows up to 155 l/h.
Increased accuracy when operating at low flow.
Greater flexibility of applications

Individual gearbox reducer for each pumphead:
Now you can have pumpheads with different S.P.M.
Enhanced flexibility.

Individual adjustment for each pumphead:
Standard manual adjustment via graduated knob or optional extra electric actuator.
Greater range of applications
Allows standardization on one configuration covering multiple liquids and applications.

All possible combinations up to 10 pumpheads

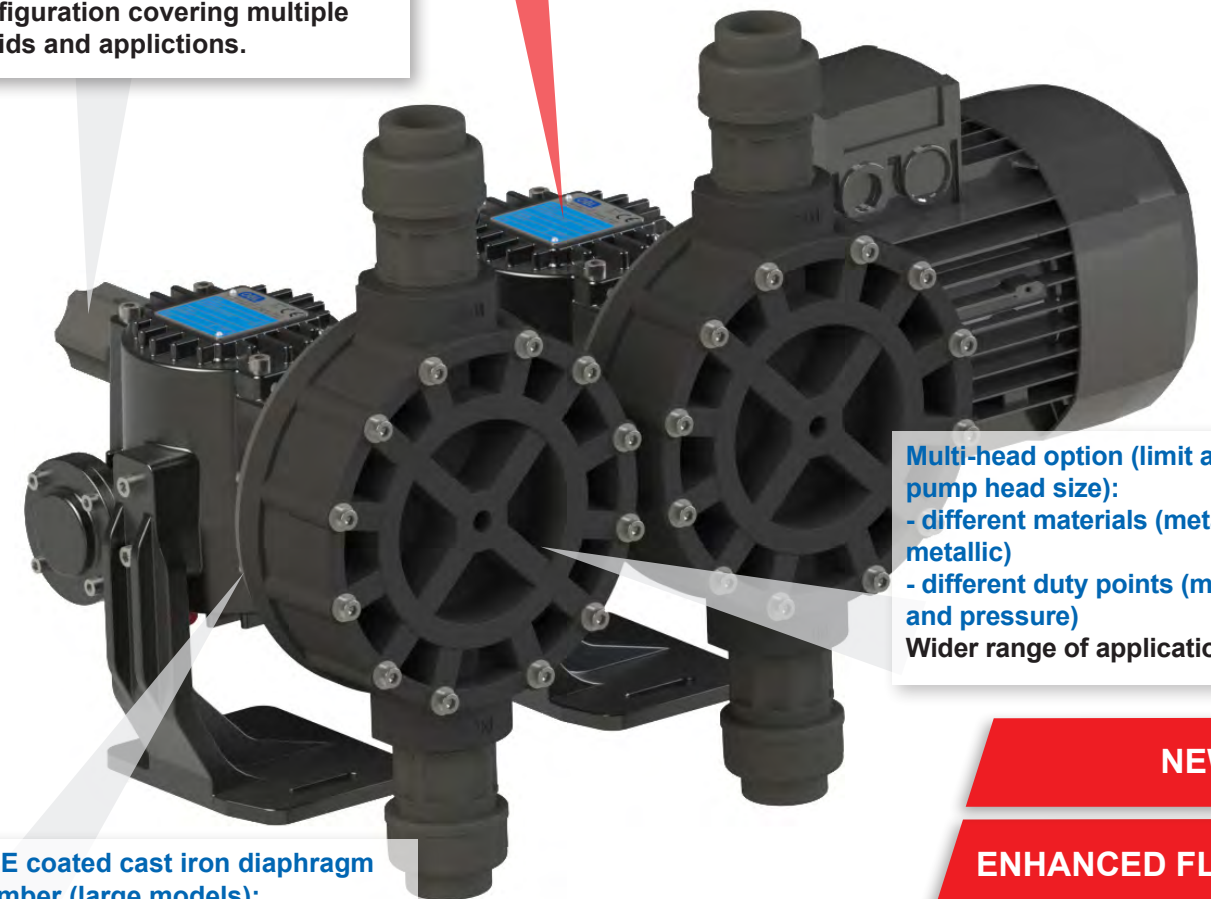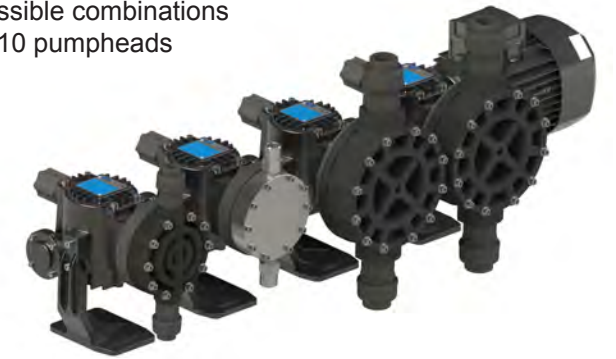

Multi-head option (limit according to pump head size):
- different materials (metallic and Non metallic)
- different duty points (max flow rates and pressure)
Wider range of applications.

PTFE coated cast iron diaphragm chamber (large models):
Increased resistance in case of liquid spillage to reduce maintenance cost.
Extends pump life and lowers life-cycle cost.

STURDIER

NEW DESIGN

ATEX

ALL models comply with ATEX (2014/34/CE) Group II, Category 3 (zone 2/22).

Injection molded PVDF pumphead:

PVDF pumphead:
Combination of PVDF pumphead, PTFE seats and PYREX check valves provides broad chemical compatibility.
Allows standardization on one configuration covering multiple liquids and applications.



ATEX

ALL models comply with ATEX (2014/34/CE) Group II, Category 3 (zone 2/22).

NEW DESIGN

ENHANCED FLEXIBILITY

Duplex unit with manifolds:
Achieving flowrates up to 1.042 l/h



► Sectional view

THREADED CONNECTIONS



FLANGED CONNECTIONS



FEATURES & BENEFITS


Valve & Seat material options: Ceramic, Stainless Steel, Incoloy-825, Hastelloy C-276.
 Increased performance when handling high density and viscous liquids as well as highly abrasive and aggressive fluids while minimizing cost impact.
Extends pump life and lowers life-cycle cost.

► Diaphragm Structure

OBL's mechanical diaphragm operates similar to a plunger by delivering the swept volume of the diaphragm whilst acting as a separating element between casing and liquid end. OBL's unique diaphragm design allows controlled volumetric displacement and ensures a linear proportional flowrate according to stroke length setting.

FEATURE & BENEFITS

PP diaphragm back-support ring: Protection against discharge overpressure.
Reduces downtime and cleanup, "minimizing" chemical exposure.

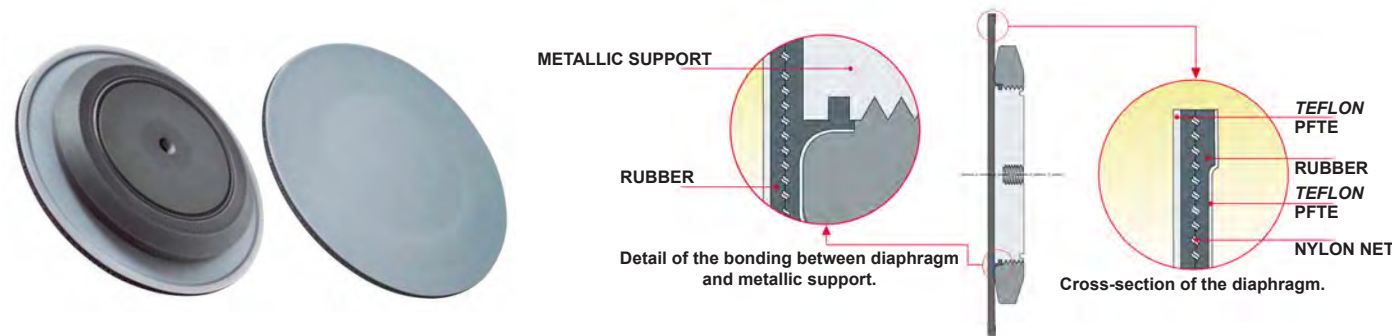


► Flowrate linearity

OBL mechanical diaphragm pumps operation reflects that of a plunger pump providing similar flowrate linearity. This peculiarity is highlighted in the diagram on the left. The progress of the flow lines is clearly linear and proportional to stroke length adjustment.

FEATURES & BENEFITS

Multiple layer PTFE diaphragm:
 Flowrate is virtually unaffected by working pressure variations (1% less flow with every additional bar above 1,5 barg.)
 - Protection against corrosive fumes entering the diaphragm chamber
 - Reduced friction thanks to diaphragm supporting-ring
 - Optimal leak-free seal thanks to stress-proof diaphragm
Extends pump life and lowers life-cycle cost.

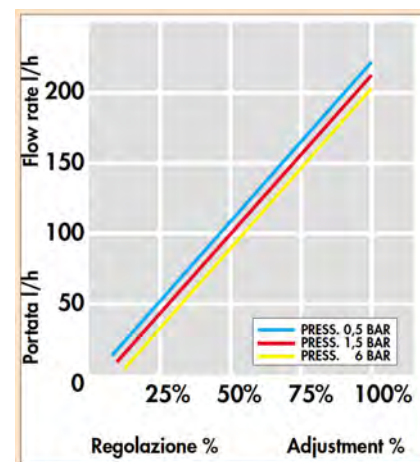

► Markets & Applications

OBL pumps are designed to cover the needs of your system and other applications listed below:

BOILERS Water Quality Control



- Corrosion Inhibitors (Oxygen scavengers, etc) Anti-scaling reagents.
- Conductivity control (chemistry adjustment) pH control (acids and caustics).
- ORP (Oxidation-Reduction Potential) Anti-fouling and biological growth control (Biocides).

CHEMICAL



- Various Additive and Reactors (Chemical Reaction Process).
- Drum / Tote.
- Injection, Mixing and much more.

MINING



- Ore Separation: Leaching process (cyanides, sulphuric acid, solvents, etc.).
- Flotation collectors (polymers, etc). Defoamers emulsifiers. Depressants and Dispersant chemicals (Iron sulfide).
- Dust control (Dosing of wetting chemicals).

COOLING TOWERS Water Quality Control



- Corrosion Inhibitors, Anti-scaling reagents, pH control (acids and caustics).
- ORP (Oxidation-Reduction Potential) Anti-fouling and biological growth control (Biocides).

WATER TREATMENT Chemical Addition



- Odors Control (Hydrogen peroxide, Potassium permanganate, Activated carbon).
- Ph control (dosing of acids and caustics).
- Flotation and Clarification (Aluminium Sulfate, PAC, Ferric Chloride).
- Disinfection (Chlorine, Sodium Hypochlorite).

PULP AND PAPER




- Whitening and Bleaching process (Hydrogen Peroxide, Hypochlorite, Chlorine).
- Sizing (fillers, e.g. starch, polymers), Strengthening (Urea based chemicals, etc.), Pigmentation (dyes, pigments, etc).
- De-inking chemicals in recycling paper process (Sodium silicates, Sodium Hydroxide, Lime, Calcium Chloride, etc.).

Technical data

Ø DIAPH./ STROKE	50 Hz			60 Hz			MAX PRESS. bar	
	TYPE	STROKES / 1	MAX FLOW RATE l/h	TYPE	STROKES / 1	MAX FLOW RATE l/h	3ph	1ph
2 94	M 7	25	7	M 9	30	9	12	12
	M 11	36	11	M 14	43	14		
	M 16	50	16	M 19	60	19		
	M 23	70	23					
	M 31	95	31	M 28	84	28		
	M 37	115	37	M 36	114	36		
4 108	M 50	155	50	M 45	138	45	10	10
	M 35	36	35	M 42	43	42		
	M 49	50	49	M 58	60	58		
	M 75	70	75	M 90	84	90		
	M 101	95	101					
	M 120	115	120	M 118	114	118		
6 138	M 155	155	155	M 145	138	145	8	8
	M 102	36	100	M 119	43	120		
	M 131	50	132					
	M 201	70	197	M 158	60	158		
	M 261	95	260	M 236	84	236		
	M 321	115	320	M 312	114	312		
6 165	M 421	155	420	M 384	138	384	7	7
	M 150	36	150	M 180	43	165		
	M 190	50	200	M 228	60	228		
	M 301	70	300	M 360	84	350		
	M 431	95	435	M 519	114	515		
	M 521	115	520					
6 165	M 660	155	660	M 620	138	620	5	5
							3,5	3,5

Performance

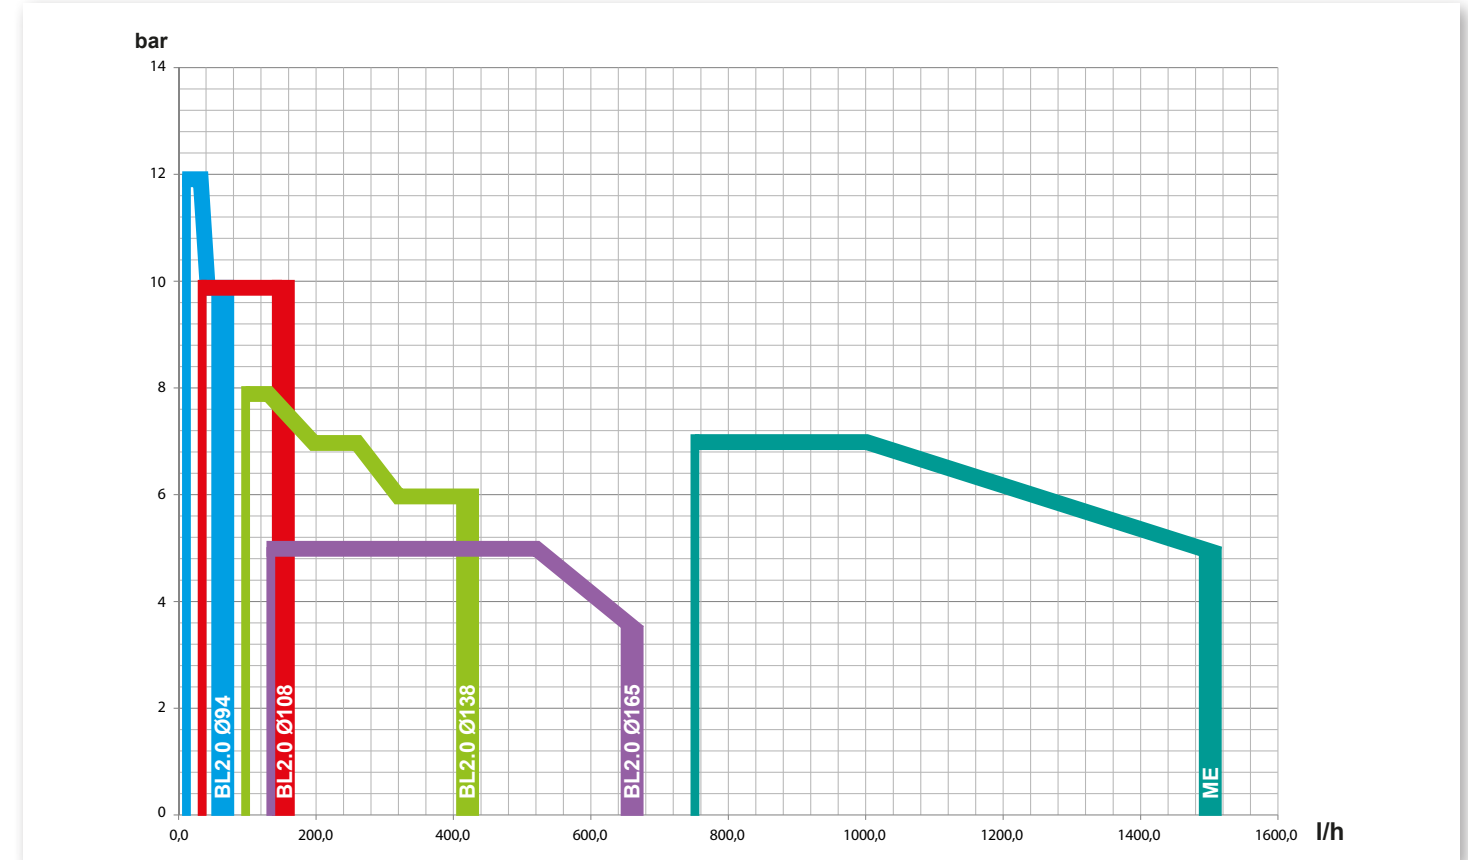

Material of construction

COMPONENTS	A	PP	PP11	PP32	S562
PUMP HEAD	AISI-316L	PP	PP	PP	PVDF
DIAPHRAGM	PTFE	PTFE	PTFE	PTFE	PTFE
VALVE GUIDE	PP	PP	PP	PP	PVDF
VALVE SEAT	AISI-316L	PVC	AISI-316L	INCOLOY-825	PTFE
VALVE (BALL)	AISI-316L	PYREX	AISI-316L	HASTELLOY C-276	PYREX
VALVE HOUSING	AISI-316L	PP	PP	PP	PVDF
VALVE SEAL	FPM	FPM	FPM	FPM	PTFE
FLANGE	AISI-316L	PVC	PVC	PVC	PVDF

Overall dimensions

