



-pump.com

CHEMICAL PUMP Acid & Alkali Resistant

Chinese Top Brand

Professional Manufacturer



th China

, Ltd.
Town, Dongguan City, Guangdong

ation

ustrial Park phase 1, Economic and
u City, Jiangxi Province, China

a

-speed Railway New City, Xiangcheng District,

advantage exploded view




and flat gasket sealing structure design, compared with similar 2%, thus minimizing the impact on liquid performance; low noise and stable pressure, suitable for installation and use groove; never damaged by dry running, the average service life of more than coating and scrubber.

① QHD - 65 - SK - 7.5 - 5 - V - G - V38 - G - A - A - S

5-5"
 -10HP; 15-15HP; 20-20HP; 30-30HP

E-CFREIFE
 40V; V48-3Ø/480V; V66-3Ø/660V; V32-3Ø/220V

Normal Motor; C-IE5 Normal Motor; D-Variable Frequency Motor; E-IE3, BT4 Ex-Proof Motor; F-IE4, BT4 Ex-Proof Motor; G-IE5, BT4 Ex-Proof Motor; H-IE5, CT4 Ex-Proof Motor; K-Permanent magnet variable frequency motor; L-BT4 Ex-Proof Variable Frequency Motor; M-

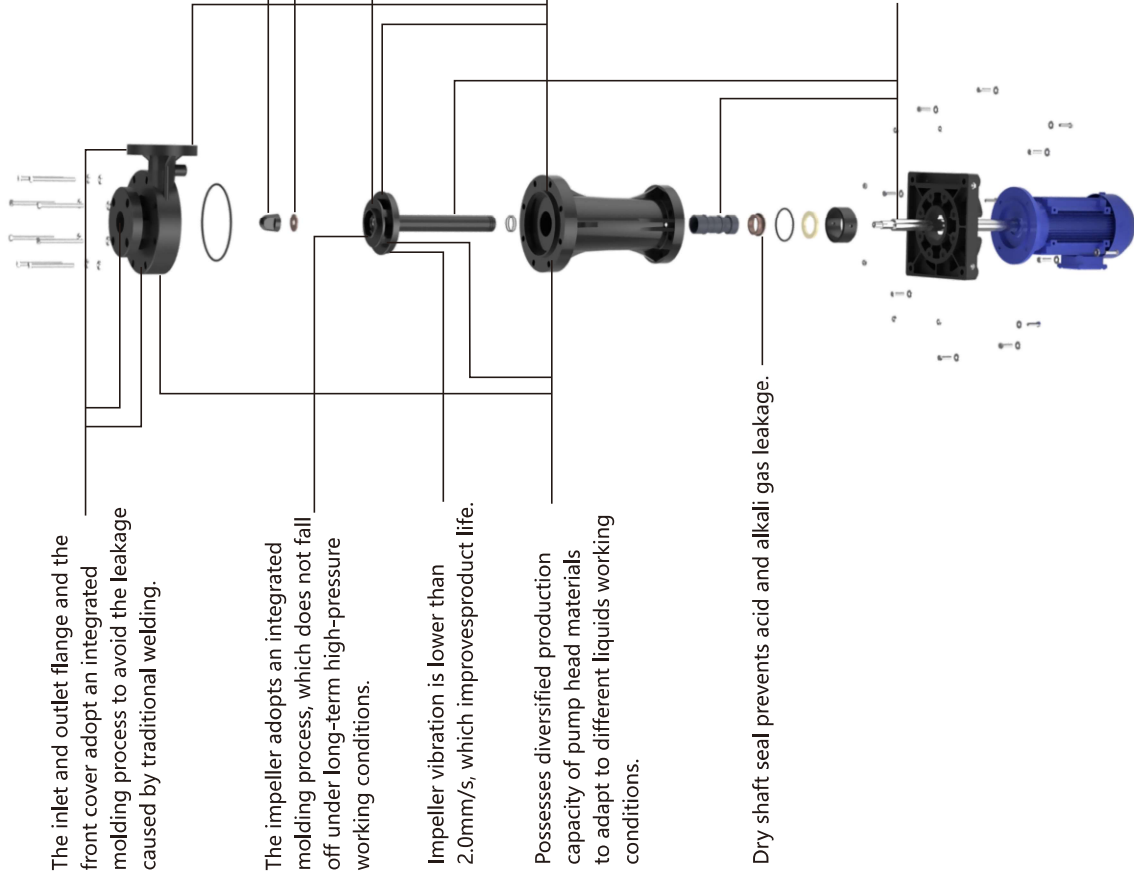

The inlet and outlet flange and the front cover adopt an integrated molding process to avoid the leakage caused by traditional welding.

The impeller adopts an integrated molding process, which does not fall off under long-term high-pressure working conditions.

Impeller vibration is lower than 2.0mm/s, which improves product life.

Possesses diversified production capacity of pump head materials to adapt to different liquids working conditions.

Dry shaft seal prevents acid and alkali gas leakage.

Power HP	Power KW	Max. head		Max. flow		Weight (kg)		
		50Hz	60Hz	50Hz (L/min) (m ³ /h)	60Hz (L/min) (m ³ /h)			
1	0.75	12	13	233	14	230	13.8	23.3
2	1.5	16	17	283	17	283	17	26.8
3	2.2	19	23	316	19	330	19.8	27.6
3	2.2	18	19	483	29	450	27	28.8
5	4	26	27	633	38	583	35	40.6
5	4	25	24	683	41	625	37.5	40.5
7.5	5.5	28	31	733	44	666	40	58.3
10	7.5	35	40	833	50	775	46.5	61.8
10	7.5	23	21	1366	82	1166	70	63.7
15	11	35	35	1650	99	1450	87	73.5
20	15	30	32	4500	270	4350	261	135.8
30	22	41	43	5000	300	4800	288	175.7