

SW-60/120/250 Series


Stainless Steel Centrifugal Pumps

SW-60/120/250

FOR: VIETNAM, TAIWAN

Series Stainless Steel Centrifugal Pumps

Đường cong / Curve

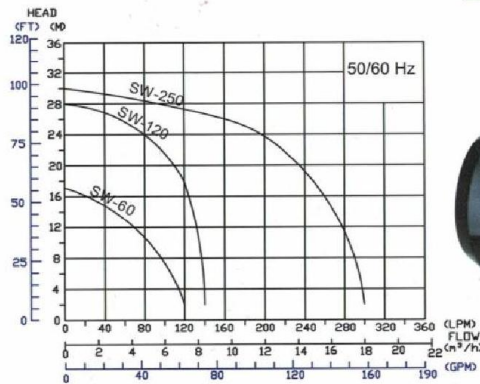

xác nhận / Certification



27

Tính năng / Features

- 1, clean water
 - 2, low noise
 - 3, motor protection rating: IP55
 - 4, high quality mechanical shaft is resistant to temperature of 90
- Liquids come into contact with pump are stainless steel
Design of a new cooling fan, red wind shear operation more mute
Higher level of protection, suitable outdoor
Suitable for temperature of 90 (SW-120S/250S)

Ứng dụng / Applications

- Air conditioner cooling systems
- Industrial cleaning applications
- Water filtration system

SW-60/120/250

- Liquid temperature: 0~70°C / 32~158°F
- HP range: 1/2~2-1/2 HP / 0.4~1.85KW
- PH value: 6~8
- Rated speed: 2900 / 3450rpm
- IP class: IP55
- Max. suction: 8M

SW-60S/120S/250S

- liquid temperature: 0~100°C / 32~212°F
- HP range: 1/2~2-1/2 HP / 0.4~1.85KW
- PH value: 6~8
- Rated speed: 2900 / 3450rpm
- IP class: IP55
- Max. suction: 8M

Đặc điểm kỹ thuật / Specification

Model No.	Output		Inlet		Outlet		Pass Solid Dia(mm)	Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight (Kg)
	HP	W	mm	inch	mm	inch			5M	10M	15M	20M	25M		
SW-60(S)	1/2	400	32	1-1/4"	25	1"	3	120	110	85	35	-	-	17	11
SW-120(S)	1 1/4	1000	32	1-1/4"	25	1"	3	140	138	135	125	110	65	28	15.5
SW-250(S)	2 1/2	1850	40	1-1/2"	32	1-1/4"	3	300	290	275	260	235	180	30	20

Remarks: Model No. ends with "S" is included with stainless steel strainer for hot water.

Kích thước / Dimension

Model	W	W1	L	L1	L2	H	H1	H2	DNA	DNM
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
SW-60	213	140	315	138	49	218	232	110	G1¼	G1
SW-120	213	140	315	138	49	218	232	110	G1¼	G1
SW-120T										
SW-120S										
SW-120ST	213	140	354	138	49	255	222	110	G2	G1½
SW-250										
SW-250T										
SW-250S										
SW-250ST										

Sơ đồ chức năng / Schematic Function

