



Power: 0.25 - 0.37 kW

50Hz

Pressure: Up to 30 kg/cm²

Flow: Up to 7.5 L/min

60Hz

Pressure: Up to 30 kg/cm²

Flow: Up to 8.5 L/min

Outlet: 1/4"

Applications

1. Household and industrial washing and cleaning.
2. High pressure water supplying.
3. Garden and agricultural chemicals spraying.
4. Hydraulic piping leakage testing.

Maximum output pressure

1. TH400P - 30 kg/cm²
2. TH250P - 20 kg/cm²

Standard Accessories

1. Suction hose pipe with inlet filter.
2. High pressure hose (30 ft.)
3. Overflow hose.
4. Spray gun.



Product Features

1. Portable compact design, easy to carry.
2. Easy operation, and maintenance.
3. High pressure discharge head, and large capacity.
4. Powerful electrical motor, high reliability.
5. Suitable for agricultural spraying.
6. Self priming suction function.

Optional Accessories


1. Hydraulic testing kit
(pressure gauge, valve and high pressure hose pipe).




2. Spray gun.




Sprayer Components

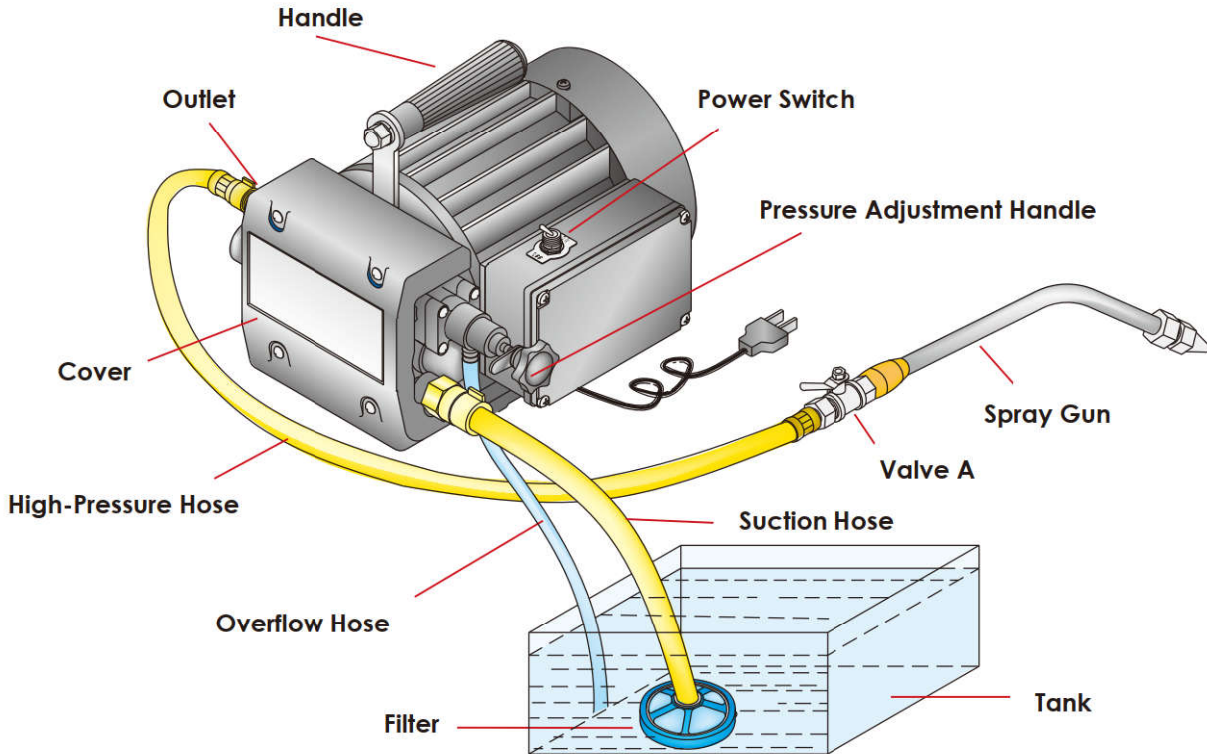

Specification, 50Hz

Type	Output (kW)	Cycle Hz	Pole P	Voltage Single V	Pressure kg/cm ²	Capacity L/min	Box Outline L x W x H mm	Weight kg	
TH250P	0.25	50	4	200 - 240	20	7.5	358 X 288 X 261	9.0	27
TH400P	0.37	50	4	200 - 240	30	7.5	358 X 288 X 261	13.2	27

Specification, 60Hz

Type	Output (kW)	Cycle Hz	Pole P	Voltage Single V	Pressure kg/cm ²	Capacity L/min	Box Outline L x W x H mm	Weight kg	
TH250P	0.25	60	4	110 or 220	20	8.5	358 X 288 X 261	9.0	27
TH400P	0.37	60	4	110 or 220	30	8.5	358 X 288 X 261	13.2	27