


| Model | Power HP | Voltage V | In/Outlet mm | H max m | Q max l/m | Demension (LxWxH) cm | Gross Weight kg |
|---------|-------------|--------------|-----------------|------------|--------------|----------------------------|-----------------------|
| DW0037 | 0.5 | 220 | 42-34 | 12 | 100 | 30x19x24 | 7 |
| DW0037T | 0.5 | 380 | 42-34 | 12 | 100 | 30x19x24 | 7 |

USES AND INSTALLATIONS

DWO series Stainless Steel Centrifugal Pump adopt SUS304 (OCR18Ni9) stainless steel with advanced stamping & weld processing technology. They are feature elegant design, corrosive-resistance, high efficiency and high pressure etc.

DWO series pump are wildly applicable for water supply, pure water feeding system and transfer liquids which are not explosive, flammable and not aggressive to SUS304. (Liquids temperature between: 4-60°C, specific weight $\leq 1 \text{ g/cm}^3$, working pressure $\leq 0.3 \text{ Mpa}$).

HYDRAULIC PERFORMANCE CURVES

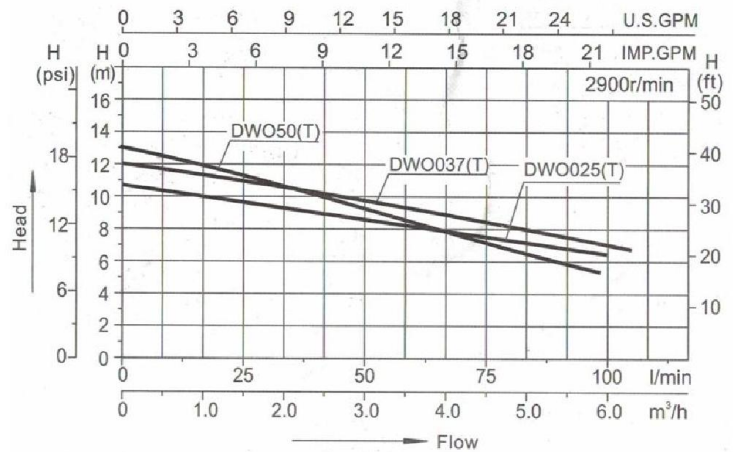

DW0037

Impeller: stainless




| Model | Power HP | Voltage V | In/Outlet mm | H max m | Q max l/m | Demension (LxWxH) cm | Gross Weight kg |
|------------|----------|-----------|--------------|---------|-----------|----------------------|-----------------|
| DWO100 (T) | 1 | 220/380 | 49-49 | 12 | 300 | 39x22x27 | 11 |
| DWO150 (T) | 1.5 | 220/380 | 60-60 | 12 | 415 | 43x26x32 | 16 |
| DWO200 (T) | 2 | 220/380 | 60-60 | 15 | 500 | 42x26x31 | 18 |
| DWO300 (T) | 3 | 220/380 | 76-60 | 17 | 630 | 47x25x31 | 22 |
| DWO400T | 4 | 380 | 76-60 | 21 | 730 | 49x26x32 | 25 |

USES AND INSTALLATIONS

DWO series Stainless Steel Centrifugal Pump adopt SUS304 (OCR18Ni9) stainless steel with advanced stamping & weld processing technology. They are feature elegant design, corrosive-resistance, high efficiency and high pressure etc.

DWO series pump are wildly applicable for water supply, pure water feeding system and transfer liquids which are not explosive, flammable and not aggressive to SUS304. (Liquids temperature between: 4-60°C, specific weight $\leq 1\text{g/cm}^3$, working pressure $\leq 0.3\text{Mpa}$).

HYDRAULIC PERFORMANCE CURVES

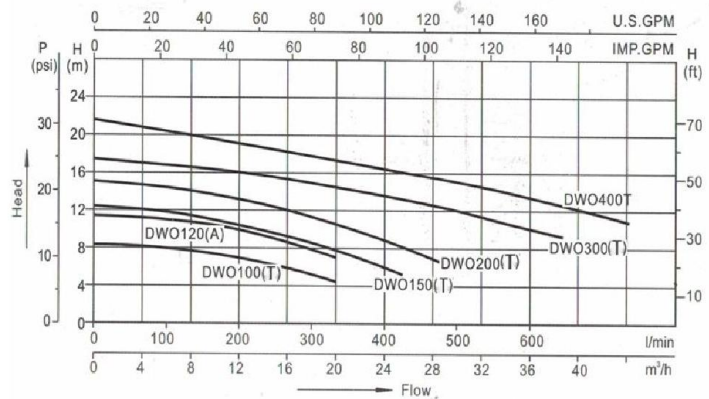

DWO(T)

Impeller: stainless

