


Model	Power HP	Voltage V	In/Outlet mm	H max m	Q max l/m	Demension (LxWxH) cm	Gross Weight kg
JEXM 5	0.5	220	34-34	34	50	39x20x23	7
JEXM 100	1	220	34-34	43	70	38x20x25	10
JEXM 150	1.3	220	34-34	50	80	45x23x27	12

USES AND INSTALLATIONS

This manual has been conceived to offer the adequate information on the installation, operation and maintenance of our electro pumps. We suggest you read it thoroughly. These are centrifugal horizontal electro pumps with self-priming capacity and supplied with century system so to reach suction of up to 9 mts. Connect a foot valve and the pump will get an immediately self-priming. They have been designed to operate with clean water at a maximum temperature of 70°C.

Operating with any kind of water, other than that just described should be avoided. These pumps have been built with first quality materials which submitted to strict hydraulic and electric controls and verified thoroughly. Following these present instructions and the electrical chart, will help you to achieve a correct installation. If failure to do this could result in motor overcharge and any other consequences, which we wish to be relieved of.

HYDRAULIC PERFORMANCE CURVES

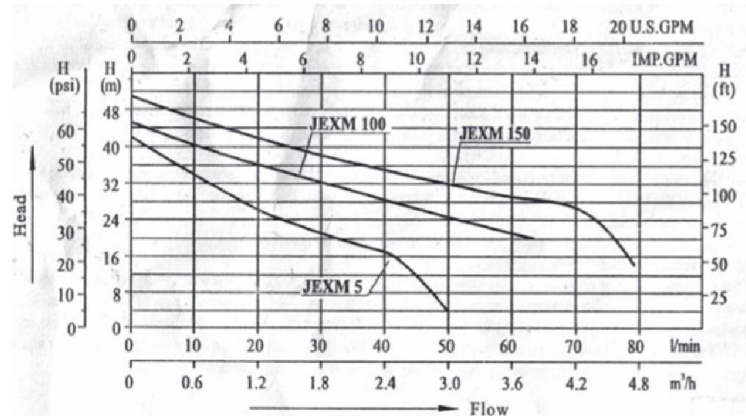

JEXM

Impeller: stainless

